



OECA Standard housing
LED, VCSEL, RCLED; PIN, APD; PINpreamp


OECA-P10x

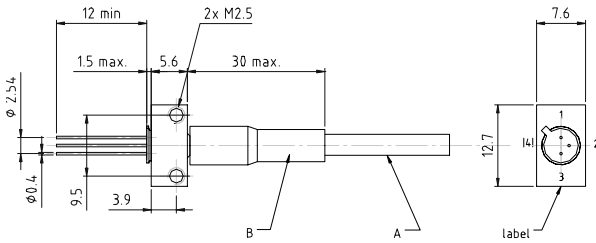


Pinout acc. to specification
 A - optical fiber acc. to specification
 fiber length, free end acc. to specification
 B - heatshrink color: yellow
 Tolerances acc. to DIN ISO 2768-mH
 all dimensions in mm



OECA-P30x

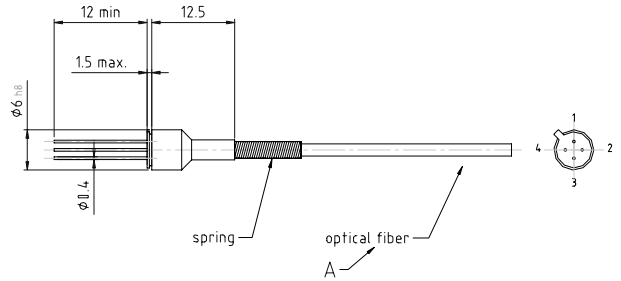

Pinout acc. to specification
 A - optical fiber acc. to specification
 fiber length, free end acc. to specification
 Tolerances acc. to DIN ISO 2768-mH
 all dimensions in mm



Product specifications are subject to change without notice.
 Copyright 2009, OECA GmbH. All Rights reserved.