OECA Standard housing
LED, VCSEL, RCLED; PIN, APD; PINpreamp

OECA-SMA100

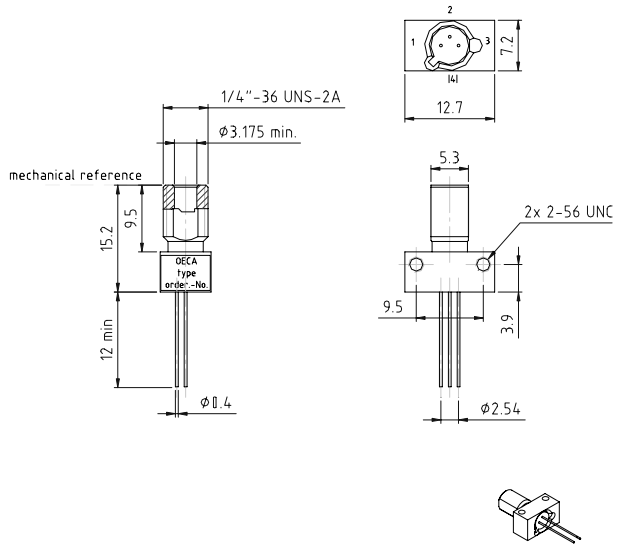

Pinout acc. to specification
tolerances acc. to DIN ISO 2768mH

all dimensions in mm

Accessories: dust cover
nut 1/4"-362UNS
washer 1/4"
2x screw 2-56UNC

OECA-SM140

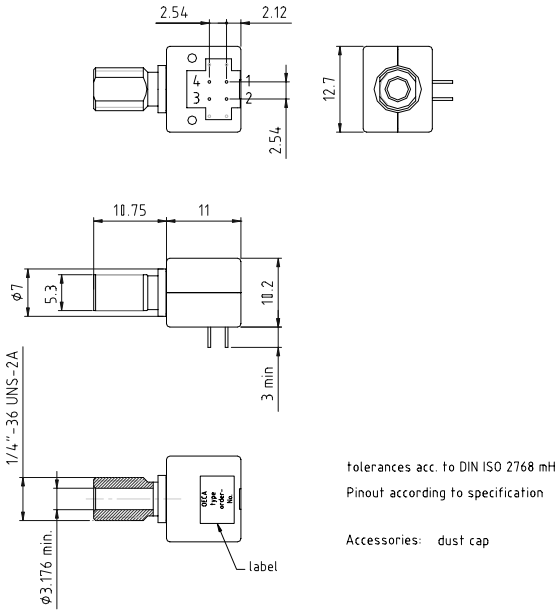

tolerances acc. to DIN ISO 2768 mH
Pinout according to specification

Accessories: dust cap

OECA-SMA200



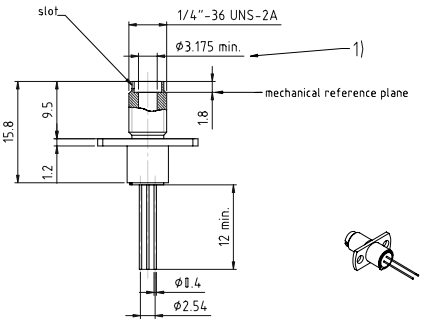

1) for connector F-SMA,
according to DIN EN 186108
- Pinout according to specification
- tolerances acc. to DIN ISO 2768mH

all dimension in mm

Accessories: dust cover
nut 1/4"-362UNS
washer 1/4"

Product specifications are subject to change without notice.
Copyright 2009, OECA GmbH. All Rights reserved.

OECA
Handwerkerstraße 13
Phone: +49 (0) 3342 36880
eMail: info@oeca.de

OPTO-ELEKTRONISCHE COMPONENTEN UND APPLIKATIONS GMBH
15366 Hoppegarten
Fax: +49 (0) 3342 3688 88
Internet: www.oeca.de

represented by:

DIN EN ISO 9001:2000
Certificate: TNI080629OG

HIV
Rosenstraße 1
Phone: +49 (0) 6834 96070
eMail: info@halbleiter-iv.de

HALBLEITER - IMPORT UND VERTRIEBS GMBH
66787 Wadgassen
Fax: +49 (0) 6834 9607 37
Internet: www.halbleiter-iv.de